



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (6) in WSD 3321/19 Pt.1 T/J(59)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.

7 March 2019

**Approval of "RENÉ" Sensor Flush Valve
(General Acceptance No. C20190168F)**

Your letters ref. DR/WSD/TT/L/19/1/27, DR/WSD/TT/L/19/1/38 and DR/WSD/TT/L/19/2/12 dated 21 January 2019, 25 January 2019 and 21 February 2019 respectively refer.

Having considered the test report ref. RDCA005r1 issued on 20 February 2019 by Ideal Test Consultants Limited, this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Dreyer
Country of Origin: the Mainland of China
Brand: RENÉ
Details of Fitting: 1¼" Sensor flush valve for WC
Model: C501XXX
(where "XXX" denote the various installation methods)
Body Markings: **RENÉ**

Expiry Date: 28 December 2023

Proviso: As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"Installation of filter before flushing valve is required. Without the filter, the flushing valve is liable to leak. The installed filter need frequent inspection and cleaning to maintain flushing supply. Normally only public toilets with good management system for maintenance would be considered."

"A stop cock or gate valve must be installed at the upstream of the fitting for manual isolation of water supply."

"The design flushing volume of the flushing valve should be compatible with the toilet bowl to ensure that effective clearance can be achieved by a single flush of water."

"Flushing valve should be used within the range of working pressures specified by the manufacturer." AND

"Installation of electronic opening and closing sanitary tapware should also comply with the requirements of Electrical & Mechanical Services Department."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,




(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c.	WSD 3321/1/82	] - without catalogue
	ME/MC	] - with soft copy only

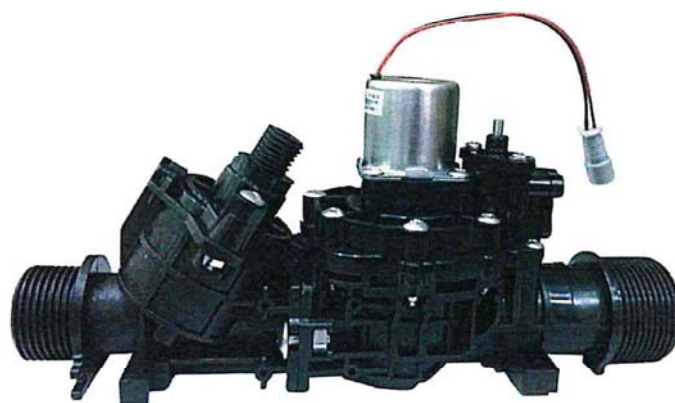

C501XXX