



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (4) in WSD 3321/2020 T/J(227/2020)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.

28 May 2020

**Approval of “PAM” Ductile Iron Fittings
(General Acceptance No. C20200371)**

Your letters ref. GWL/20/0310 and GWL/20/0310-A1 dated 10 March 2020 and 7 May 2020 respectively refer.

Having considered the test reports ref. PMA72170A, PMA72171A and PMA72172A all issued on 24 April 2020 by ETS-Testconsult Ltd. and WRAS certificate, this Authority accepts that the fittings described below comply with, and their use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Saint-Gobain Pipelines Co Ltd

Country of Origin: the Mainland of China

Brand: PAM

Details of Fittings: Ductile iron fittings with internal epoxy powder coating under WRAS approval no. 1701509

Description	Size (mm)
Double Flanged 22.5° Bend PN16	250, 300
Double Flanged 45° Bend PN16	250, 300
Double Flanged 90° Bend PN16	250, 300



Description	Size (mm)
All Flanged Tee PN16	250x250x80, 250x250x100, 250x250x150, 250x250x200, 250x252x250, 300x300x80, 300x300x100, 300x300x150, 300x300x200, 300x300x250, 300x300x300
Double Flanged Taper PN16	200x80, 250x80, 250x100, 250x150, 250x200, 300x80, 300x100, 300x150, 300x200, 300x250

Body Markings:

For Flanged 22.5° Bend:



PAM

Size in DN – 1/16 PN16

EN 545 ISO 2531

For Flanged 45° Bend:



PAM

Size in DN – 1/8 PN16

EN 545 ISO 2531

For Flanged 90° Bend:



PAM

Size in DN – 1/4 PN16

EN 545 ISO 2531

For Flanged Tee and Flanged Taper:



PAM

Size in DN PN16

EN 545 ISO 2531

Expiry Date:

31 January 2022

This Authority hereby permits the use of the above fittings in fresh water plumbing systems, flushing water plumbing systems and fresh water fire services systems subject to full adherence to Waterworks installation requirements.

A condition of this acceptance is that the fittings to be installed shall be replicas of the samples as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fittings installed fail to meet that of the approved samples or if the fittings are found to be unsuitable for use in the water supply systems mentioned above.

For the use of the fittings in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fittings by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.


c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only



Double Flange 22.5° Bend
PN16



Double Flange 45° Bend
PN16

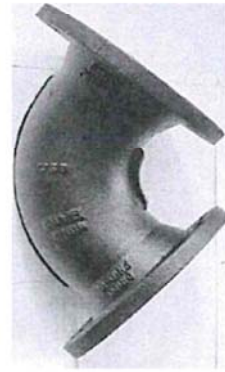

Double Flange 90° Bend
PN16



All Flange Tee PN16



Double Flange Taper PN16