



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (6) in WSD 3321/2021 T/J(10/2021)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.

13 April 2021

**Approval of “KURIMOTO” Ductile Iron Fittings
(General Acceptance No. C20210375)**

Your letters ref. 1228/2020, 235/2021 and 367/2021 dated 14 December 2020, 22 February 2021 and 22 March 2021 respectively refer.

Having considered the test reports ref. PMA04216B & PMA04218A both issued on 15 March 2021 and ref. PMA04217A issued on 9 February 2021 by ETS-Testconsult Ltd. and WRAS certificate, this Authority accepts that the fittings described below comply with, and their use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Kurimoto Ltd

Country of Origin: the Mainland of China

Brand: Kurimoto

Details of Fittings: Ductile iron fittings with internal cement mortar lining under WRAS approval no. 1906578

Description	Size (mm)
Double Flanged 90° Bend PN16	80, 100, 150, 200, 250, 300
Double Flanged 45° Bend PN16	80, 100, 150, 200, 250, 300
Double Flanged 90° Bend PN25	80, 100, 150

Description	Size (mm)
Double Flanged 45° Bend PN25	80, 100, 150, 200
Double Socket 90° Bend	80, 100, 150, 200, 250, 300
Double Socket 45° Bend	80, 100, 150, 200, 250, 300
Double Socket 22.5° Bend	80, 100, 150, 200, 250, 300
Double Socket 11.25° Bend	80, 100, 150, 200, 250, 300
All Flange Tee PN16	80x80x50, 80x80x80, 100x100x80, 100x100x100, 150x150x80, 150x150x100, 150x150x150, 200x200x80, 200x200x100, 200x200x150, 200x200x200, 250x250x250, 300x300x300
All Flanged Tee PN25	80x80x80, 100x100x100, 150x150x150
All Socket Tee	250x250x250, 300x300x300
Double Flanged Taper PN16	80x50, 100x80, 150x80, 150x100, 200x150, 250x200, 300x250
Double Socket Taper	100x80, 150x100, 200x150, 250x200, 300x250

Body Markings:

For Double Flanged Bend:

BS EN 545 DI K12 pressure rating size x angle **X**

For Double Socket Bend:

BS EN 545 DI K12 size x angle **X**

For All Flanged Tee and Double Flanged Taper:

BS EN 545 DI K12 pressure rating size **X**

For All Socket Tee and Double Socket Taper:

BS EN 545 DI K12 size **X****Expiry Date:**

30 June 2024

This Authority hereby permits the use of the above fittings in fresh water plumbing systems subject to full adherence to Waterworks installation requirements.

A condition of this acceptance is that the fittings to be installed shall be replicas of the samples as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fittings installed fail to meet that of the approved samples or if the fittings are found to be unsuitable for use in the fresh water plumbing systems.

For the use of the fittings in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fittings by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(Roger WONG)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only




Double Flanged 90° Bend PN16



Double Flanged 45° Bend PN16



Double Flanged 90° Bend PN25

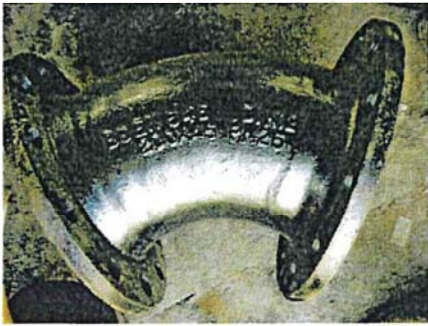

Double Flanged 45° Bend PN25



Double Socket 90° Bend



Double Socket 45° Bend



Double Socket 22.5° Bend



Double Socket 11.25° Bend



All Flange Tee PN16



All Flanged Tee PN25



All Socket Tee



Double Flanged Taper PN16



Double Socket Taper