



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (4) in WSD 3321/2023 T/J(870/2023)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.

10 October 2023

**Approval of "SINOTEC" Ductile Iron Fittings
(General Acceptance No. C20230752)**

Your letters ref. 876/2023 and 914/2023 dated 25 August 2023 and 13 September 2023 respectively refer.

Having considered the test reports ref. PMA30623, PMA30624 and PMA30625 all issued on 23 August 2023 by ETS-Testconsult Ltd. and WRAS certificate, this Authority accepts that the fittings described below comply with, and their use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Jilin Senfeng Pipe Co Ltd

Country of Origin: the Mainland of China

Brand: Sinotec

Details of Fittings: Ductile iron fittings with internal cement mortar lining under WRAS approval no. 2207526

Description	Size (mm)
Double Socket 11.25° Bend	100, 200, 250
Double Socket 22.5° Bend	100, 200, 250
Double Socket 45° Bend	100, 200, 250

Description	Size (mm)
Double Socket 90° Bend	100, 200, 250
Double Flanged 22.5° Bend	80, 100, 150, 200
Double Socket Tee with Flanged Branch	200x200x150
All Flanged Tee	200x200x150
Double Socket Taper	200x150

Body Markings:

For Double Socket Bend:

SINOTEC BS EN 545 DI K12 1.6 MPa size x angle
(Production Information)

For Double Flanged Bend:

SINOTEC BS EN 545 DI K12 PN16 1.6 MPa
size x angle (Production Information)

For Double Socket Tee and All Flanged Tee:

SINOTEC BS EN 545 DI K12 PN16 1.6MPa
size x size (Production Information)

For Double Socket Taper:

SINOTEC BS EN 545 DI K12 1.6 MPa size x size
(Production Information)

Expiry Date:

31 July 2027

This Authority hereby permits the use of the above fittings in fresh water plumbing systems, flushing water plumbing systems and fresh water fire services systems subject to full adherence to Waterworks installation requirements.

A condition of this acceptance is that the fittings to be installed shall be replicas of the samples as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fittings installed fails to meet that of the approved samples or if the fittings are found to be unsuitable for use in the water supply systems mentioned above.

For the use of the fittings in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fittings by this Authority.

Should you have any enquiries, please contact our Engineer Ms Winnie LO at tel. no. 3583 4086.

Yours faithfully,



(Terry KUNG)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only




Double Socket 11.25° Bend



Double Socket 22.5° Bend



Double Socket 45° Bend

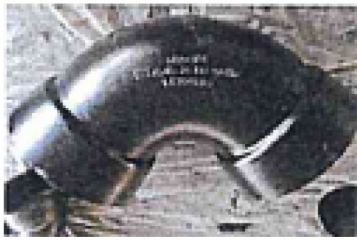

Double Socket 90° Bend



Double Flanged 22.5° Bend



Double Socket Tee with
Flanged Branch



All Flanged Tee



Double Socket Taper