



水務署
Water Supplies Department

香港灣仔告士打道七號入境事務大樓
Immigration Tower, 7 Gloucester Road, Hong Kong.

電子郵件
e-mail

wsdinfo@wsd.gov.hk

電話
Telephone

圖文傳真
Facsimile

2824 0578

檔號
Reference

(4) in WSD 3321/2026 T/J(57/2026)

8 April 2026

**Approval of "OCEANWELL" Flush Valve
(General Acceptance No. ZB20260008F)**

Your letters ref. HX/W/0108/26 and HX/W/0462/26 dated 19 January 2026 and 11 March 2026 respectively refer.

It is noted that the fitting described below has been accepted by the United Kingdom Water Regulations Advisory Scheme (WRAS) to have complied with the requirements of the Water Supply (Water Fittings) Regulations (England & Wales), the Water Supply (Water Fittings) (Scotland) Byelaws and the Water Supply (Water Fittings) Regulations (Northern Ireland) when correctly installed. This Authority accepts that the fitting described below based on the WRAS certificate complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Oceanwell (Xiamen) Industrial Co Ltd

Country of Origin: Chinese Mainland

Brand: Oceanwell

Details of Fitting: Plastic dual flush valve

Model: CJ302

Size: 2"



東江水供港



香港環境卓越大獎



獲頒發由香港社會服務界

Body Markings: Oceanwell and model number on valve body

WRAS Approval Number: 2203023

Installation Requirements: R001, R571, R581
(Appendix A of WRAS approval letter refers)

Expiry Date: 7 April 2031

Proviso: As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing systems.

In view of the acceptance by WRAS, this Authority has no objection to the use of the said fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirements –

“Installation shall comply with the ‘Installation Requirements & Notes’ of the WRAS’s approval letter concerned.”

“The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush.”

“The fitting should be used within the range of working pressures specified by the manufacturer.” AND


“The installed fitting should not result in backflow of water that will contaminate the flushing water supply.”

A condition of this acceptance is that the fitting to be installed should be replica of the sample certified by WRAS and no modification should be made to the fitting. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved samples or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer
Mr Albert CHOW at tel. no. 3583 4086.


Yours faithfully,



(CHAN Kwok Leung, Douglas)
for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only

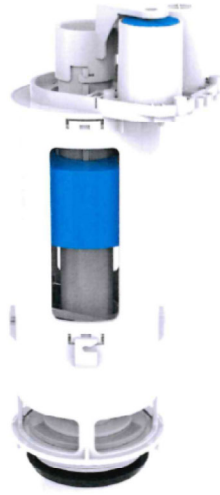

CJ302