



水務署
Water Supplies Department

香港灣仔告士打道七號入境事務大樓
Immigration Tower, 7 Gloucester Road, Hong Kong.

電子郵遞
e-mail wsdinfo@wsd.gov.hk

電話
Telephone

圖文傳真
Facsimile

2824 0578

檔號
Reference

(4) in WSD 3321/2025 T/J(587/2025)

7 August 2025

**Approval of “TYT” Ball Valves
(General Acceptance No. ZC20250581)**

Your letters ref. WSD-20-06-2025 and WSD-11-07-2025 dated 20 June 2025 and 11 July 2025 respectively refer.

Having considered the test report ref. 251452PC250440(1)A issued on 10 July 2025 by Fugro Technical Services Limited, this Authority accepts that the fittings described below comply with, and their use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: M/s Goodyear Valves Works Corp

Country of Origin: Taiwan, China

Brand: TYT

Details of Fittings: Copper alloy ball valve

Model: TYT-506

Size: 15mm, 20mm, 25mm, 32mm, 40mm, 50mm, 65mm, 80mm

Body Markings: TYT size in inch



Expiry Date: 10 September 2030

This Authority hereby permits the use of the above fittings in fresh water plumbing systems and fresh water fire services systems subject to full adherence to Waterworks installation requirements.

A condition of this acceptance is that the fittings to be installed shall be replicas of the samples as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fittings installed fails to meet that of the approved samples or if the fittings are found to be unsuitable for use in the water supply systems mentioned above.

For the use of the fittings in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fittings by this Authority.

Should you have any enquiries, please contact our Engineer Mr Albert CHOW at tel. no. 3583 4086.

Yours faithfully,




(Terry KUNG)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only

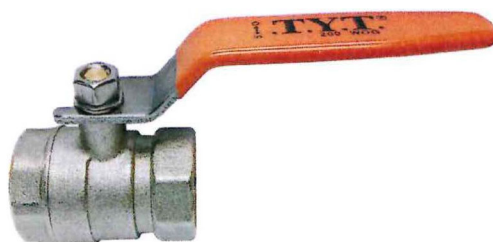

TYT-506